2400 Data Sheet

2000

SERIES: 2000 LINEAR WOOD

STYLE: 2400 TONGUE AND GROOVE LINEAR

Overview

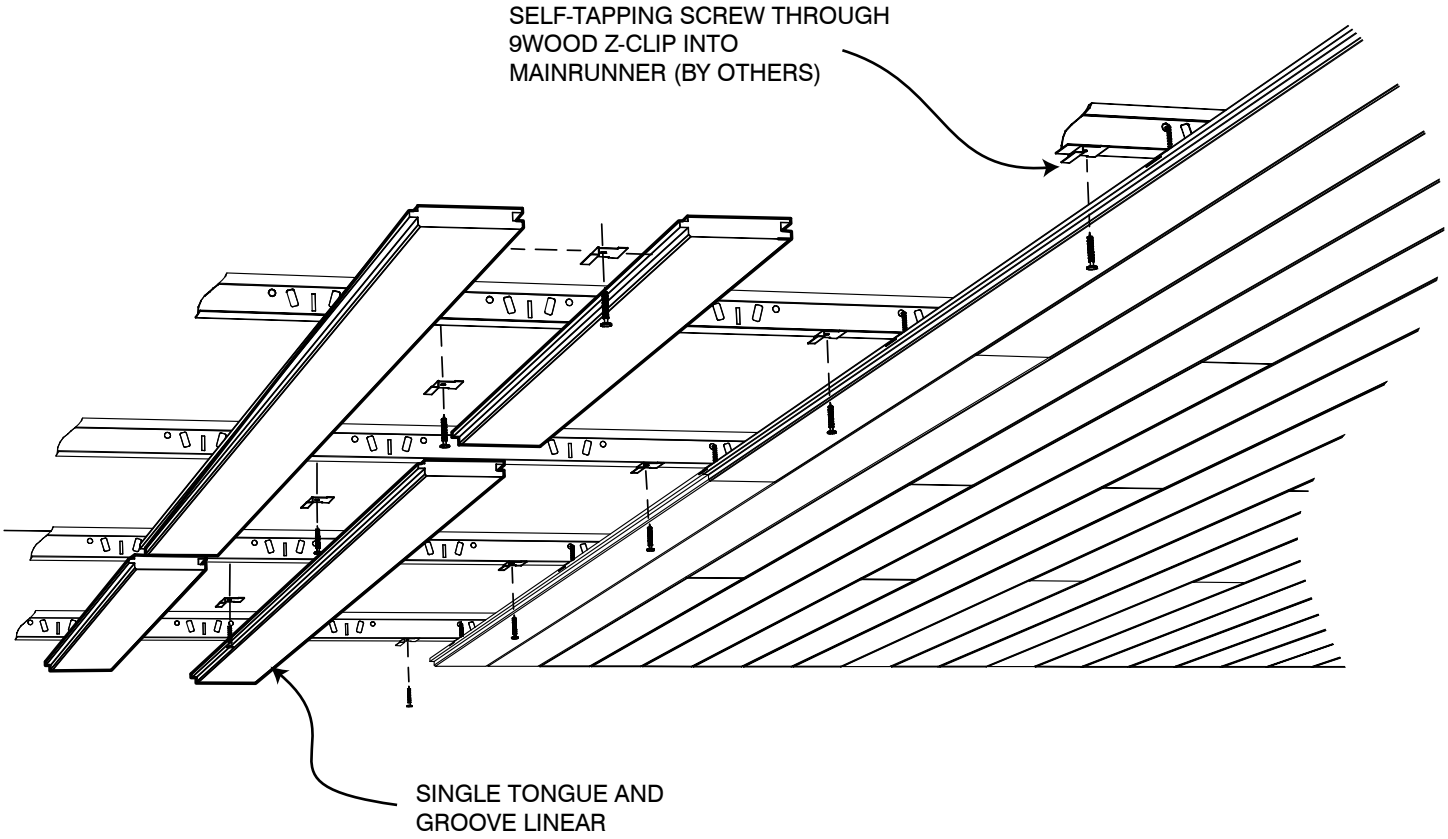

The 9Wood Tongue and Groove Linear wood ceiling offers the classic linear ceiling design where the individual wood members abut with a “V” groove accenting the edge-to-edge joint. Members are installed randomly to create a continuous look. The Tongue and Groove linear system is provided in random lengths to maximize material yield.

Attachment for the Tongue and Groove Linear is via progressive install, utilizing the 9Wood Z-Clip.

2400 Data Sheet

2000

SERIES: 2000 LINEAR WOOD

STYLE: 2400 TONGUE AND GROOVE LINEAR

Product Data

Application

The Tongue and Groove Linear provides the classic “V” Groove closed reveal look and creates a continuous, monolithic ceiling field. Access can be through strategically located access panels or from ceiling perimeters. Members are clipped to T-Bar main runners progressively.

Performance

Acclimatization
T&G Linears must be cared for in a controlled interior environment (RH 25%-55% max; temp. 60°-80°) and installed only after reaching equilibrium moisture content. Should the building fall outside these limits consult 9Wood for our 3 Tests/3 Tracks Acclimatization Advisory.

Acoustics
The T&G Linear is considered acoustically reflective.

Fire Rating
Individual members and components can be treated with Class I (A) Fire Retardant chemicals (solid wood use FR coatings). Particular species or styles have not been tested.

LEED
T&G Linears may qualify toward MR-3, MR-4.1/4.2, MR-5.1/5.2, MR-6, MR-7, IEQ-4.2 or IEQ-4.4. As all products are custom-fabricated, LEED credit opportunities are project by project. Please contact 9Wood for specifics.

MEP
The T&G Linear permits MEP penetrations in the ceiling’s surface. Supplemental suspension may be required at penetrations. Fixtures and diffusers must be independently supported.

Seismic
Clips are typically mechanically screwed to T-Bar for seismic compliance. Please consult local code or a licensed engineer for any additional requirements.

Species & Finishes
9Wood can offer both domestic and imported species for the T&G Linear. Clear, matte sheen finish is standard; custom color matches and opaque finishes are available.

Suspension
T&G Linears are attached to 15/16” heavy duty T-Bar main runners via clips and screws. Main runners are installed 2’ on center, depending on system weight.

System Weight
T&G Linears typically weigh 2-4 pounds per square foot, depending on members per linear foot and species.

2400 Data Sheet

2000

SERIES: 2000 LINEAR WOOD

STYLE: 2400 TONGUE AND GROOVE LINEAR

Typical Specifications

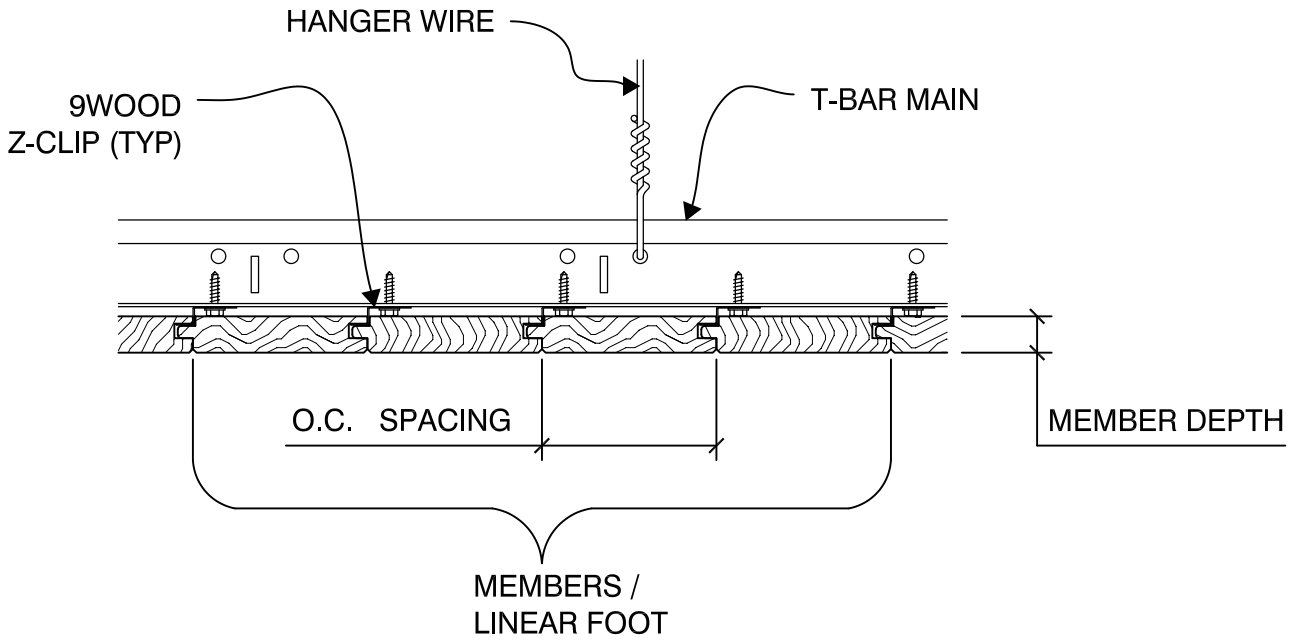

SKU Table

Depth (Softwood)	Depth (Hardwood)	O.C. Spacing	Members per Linear Foot				
			2	3	4	5	6
5/8”	3/4”	3”	2414-4				
3/4”	3/4”	5”	2416-2				

Additional width, depth, and M/LF options may be available. Please check with 9Wood if you don’t see the combination that you have in mind.

999 South A Street Springfield, OR 97477 tel 888.767.9990 fax 888.767.9998 sales@9wood.com www.9wood.com

2400 Data Sheet

2000

SERIES: 2000 LINEAR WOOD

STYLE: 2400 TONGUE AND GROOVE LINEAR

Perimeter Conditions and Suspension

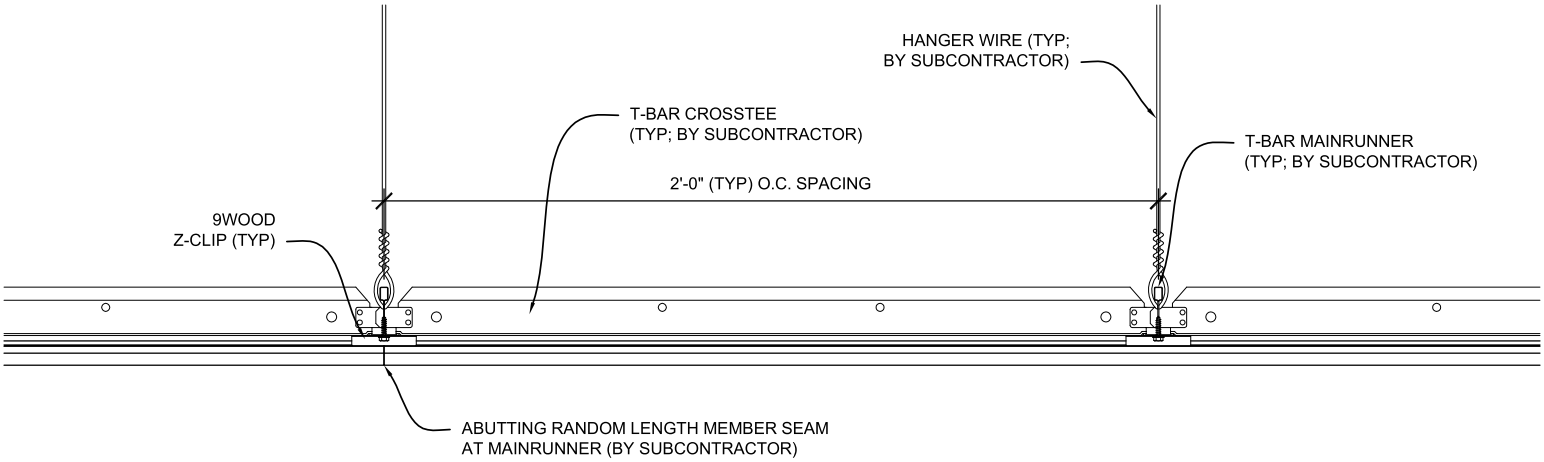

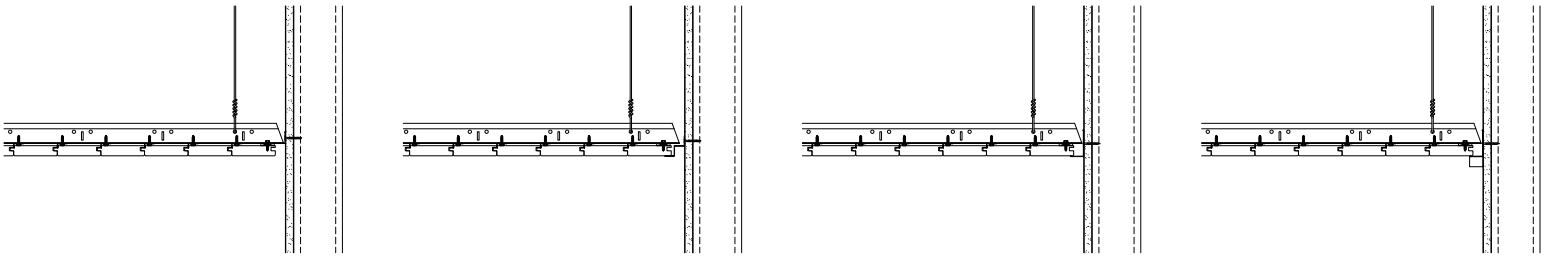

FLOATING OPEN REVEAL

METAL TRIM
SHADOW STYLE WALL ANGLE

METAL TRIM WALL ANGLE

WALL ANGLE w/ WOOD TRIM

999 South A Street Springfield, OR 97477 tel 888.767.9990 fax 888.767.9998 sales@9wood.com www.9wood.com