




## 1200 Data Sheet



SERIES: 1000 WOOD GRILLES

STYLE: 1200 DOWEL GRILLE

## Overview

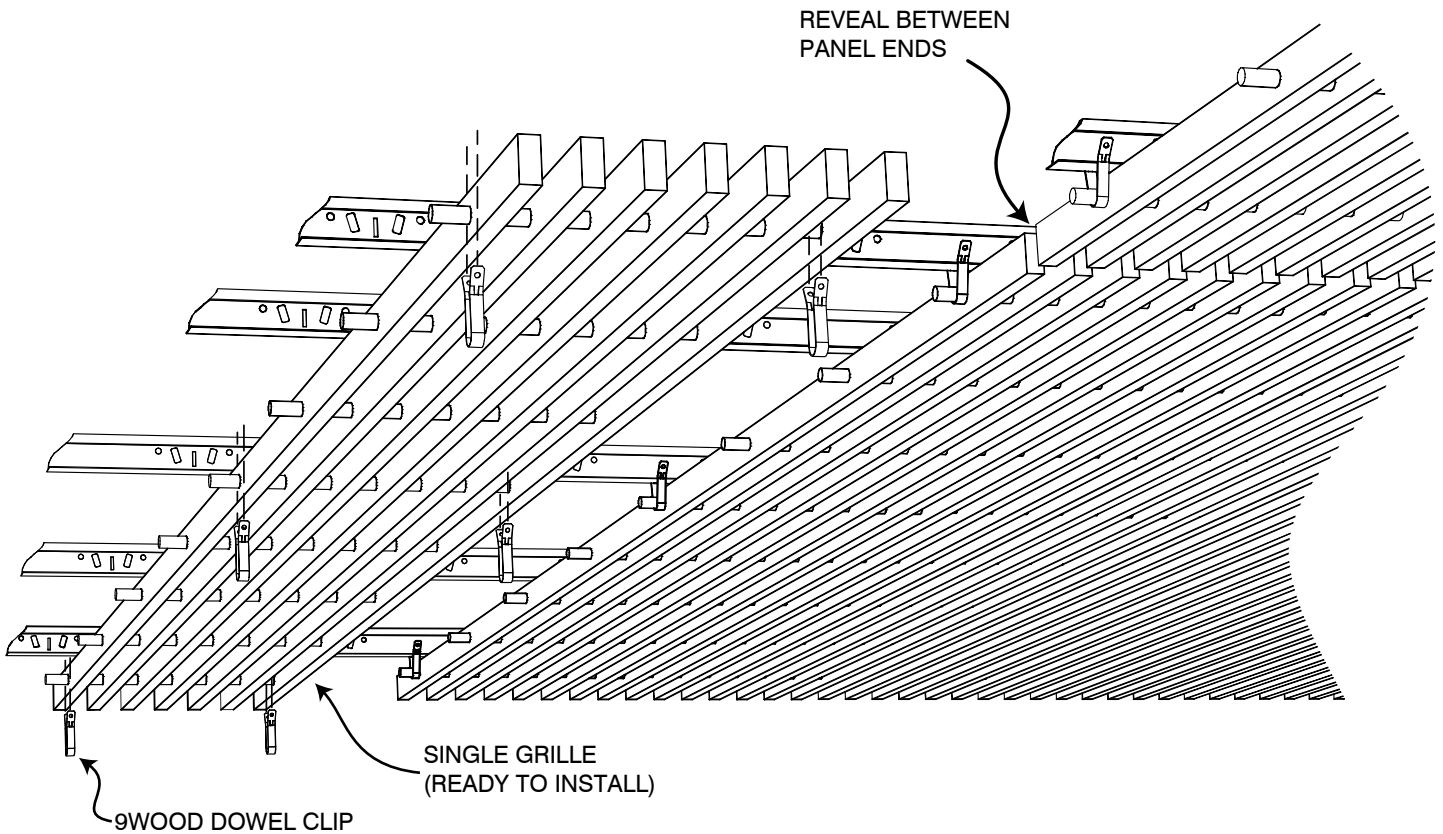

The **9Wood Dowel Grille** wood ceiling offers a design where the individual wood member is deeper than it is wide. The standard panel width is 12". Standard panel lengths are 4' through 10' for solid wood, or 8' for veneers. Budget and application generally drive the decision between solid wood or veneer.

**Attachment** for the Dowel Grille is via 9Wood Dowel Clips in non-seismic zones for a high level of accessibility. In seismic zones a supplemental cross piece backer is required (see 1400 Dowel/Cross Piece Grilles).



## 1200 Data Sheet



SERIES: 1000 WOOD GRILLES

STYLE: 1200 DOWEL GRILLE

# Product Data

## Application

The Dowel Grille offers a classic aesthetic, using a pre-assembled fabrication process for its wood members and dowels. The Dowel Grille is efficiently installed using a dowel clip designed for HD 15/16" T-Bar grid. It is best suited for applications where regular access is needed, in non-seismic areas. (For seismic areas, the 1400 Dowel/Cross Piece Grille is suggested due to its direct-screw attachment through the cross piece backer.)

## Performance

### Acclimatization

Dowel Grilles must be cared for in a controlled interior environment (RH 25%-55% max; temp. 60°-80°) and installed only after reaching equilibrium moisture content. Should the building fall outside these limits consult 9Wood, Inc. for our 3 Tests/3 Tracks Acclimatization Advisory.

### Acoustics

The Dowel Grille can enhance acoustics via sound absorbing material placed over open reveals within the T-Bar grid. Insulation is typically provided locally.

### Fire Rating

Individual members and components can be treated with Class I (A) Fire Retardant chemicals (solid wood use FR coatings, veneered particleboard use FR formulas). Particular species or styles have not been tested.

### LEED

Dowel Grilles may qualify toward MR-3, MR-4.1/4.2, MR-5.1/5.2, MR-6, MR-7, IEQ-4.2 or IEQ-4.4. As all products are custom-fabricated, LEED credit opportunities are project by project. Please contact 9Wood, Inc. for specifics.

### MEP

The Dowel Grille permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement. Fixtures and diffusers must be independently supported.

### Seismic

Dowel grilles can provide seismic compliance by way of supplemental hanger wires looped through dowel clips; however, the benefits of the dowel clip system are limited. 9wood recommends the use of our 1400 series with direct attachment through the backer in seismic zones.

### Species & Finishes

9Wood can offer both domestic and imported species for the Dowel Grille. Clear, matte sheen finish is standard; custom color matches and opaque finishes are available.

### Suspension

Dowel Grilles are clipped onto 15/16" heavy duty T-Bar main runners. Main runners are installed 2' on center, depending on system weight.

### System Weight

Dowel Grilles typically weigh 2-4 pounds per square foot, depending on members per linear foot and species.




# 1200 Data Sheet



SERIES: 1000 WOOD GRILLES

STYLE: 1200 DOWEL GRILLE

## Typical Specifications

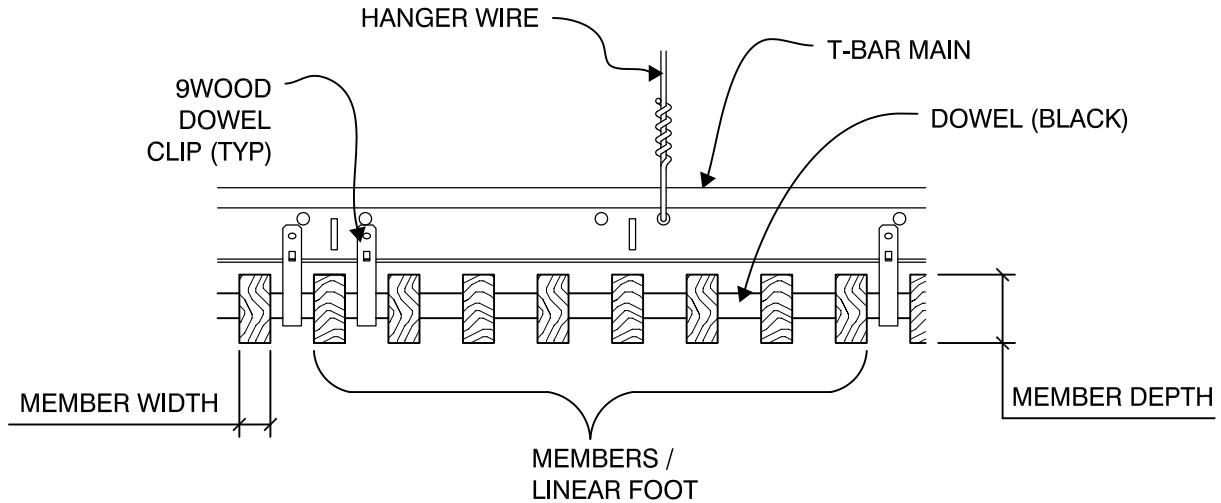

### SKU Table

Width (Softwood)	Width (Hardwood or Veneer)	Depth	Grille Members per Linear Foot						
			2	3	4	5	6	7	8
5/8" or 3/4"	3/4"	1 3/8"	1212-2	1212-3	1212-4	1212-5	1212-6	1212-7	1212-8
5/8" or 3/4"	3/4"	2 1/4"	1213-2	1213-3	1213-4	1213-5	1213-6	1213-7	1213-8
5/8" or 3/4"	3/4"	3 1/4"	1214-2	1214-3	1214-4	1214-5	1214-6		
3/4"	3/4"	5 1/4"	1216-2	1216-3	1216-4	1216-5			
1 3/8"	1"	1 3/8"	1222-2	1222-3	1222-4	1222-5			
1 3/8"	1"	2 1/4"	1223-2	1223-3	1223-4				
1 3/8"	1"	3 1/4"	1224-2	1224-3	1224-4				
1 3/8"	1"	5 1/4"	1226-2	1226-3					

Additional width, depth, and M/LF options may be available. Please check with 9Wood if you don't see the combination that you have in mind.




# 1200 Data Sheet


SERIES: 1000 WOOD GRILLES

STYLE: 1200 DOWEL GRILLE


## Perimeter Conditions and Suspension

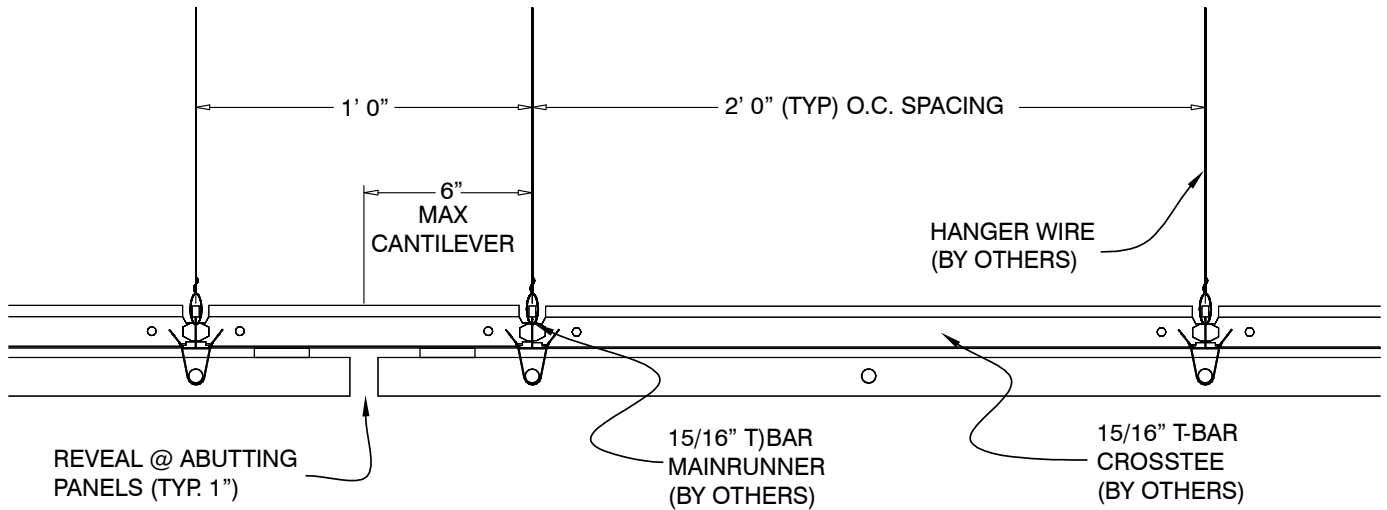


NOTE: A CENTER REVEAL TYPICALLY REQUIRES A CUSTOM OC SPACING IN THE SUSPENSION SYSTEM

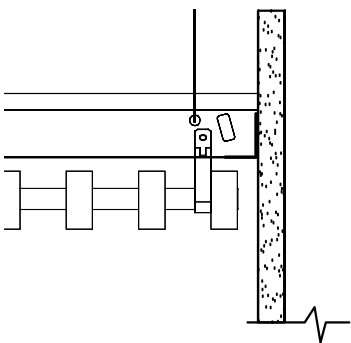


FLOATING:  
OPEN REVEAL

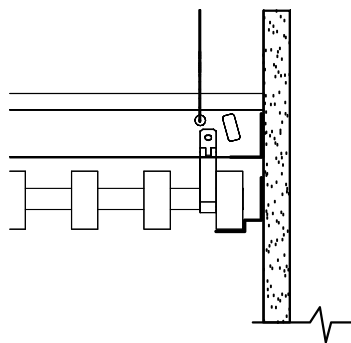

METAL TRIM:  
CONT. SHADOW STYLE  
WALL ANGLE

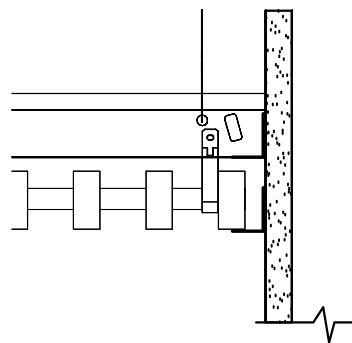

METAL TRIM:  
CONT. WALL ANGLE

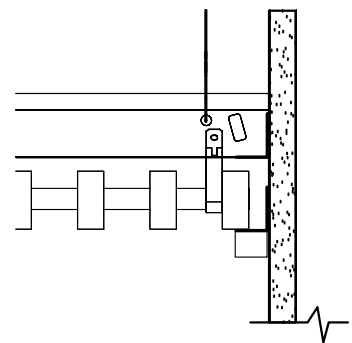

WOOD TRIM:  
CONT. WALL ANGLE  
W/WOOD TRIM